


Data visualization with ggplot2 : : CHEATSHEET




Basics

ggplot2 is based on the **grammar of graphics**, the idea that you can build every graph from the same components: a **data** set, a **coordinate system**, and **geoms**—visual marks that represent data points.

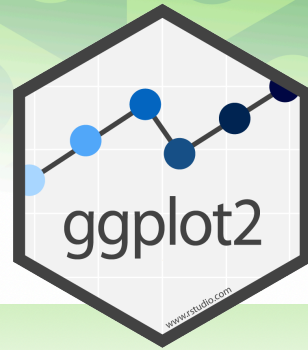

To display values, map variables in the data to visual properties of the geom (**aesthetics**) like **size**, **color**, and **x** and **y** locations.

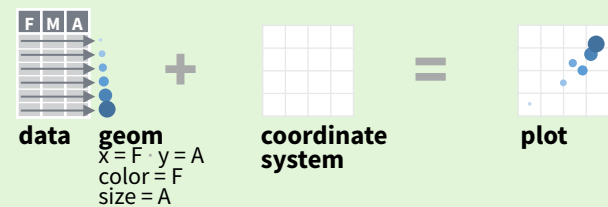

Complete the template below to build a graph.

```
ggplot (data = <DATA>) +
  <GEOM_FUNCTION> (mapping = aes (<MAPPINGS>),
  stat = <STAT>, position = <POSITION>) +
  <COORDINATE_FUNCTION> +
  <FACET_FUNCTION> +
  <SCALE_FUNCTION> +
  <THEME_FUNCTION>
```

required (points to the first two lines)
Not required, sensible defaults supplied (points to the last four lines)

ggplot(data = mpg, aes(x = cty, y = hwy)) Begins a plot that you finish by adding layers to. Add one geom function per layer.

last_plot() Returns the last plot.

ggsave("plot.png", width = 5, height = 5) Saves last plot as 5' x 5' file named "plot.png" in working directory. Matches file type to file extension.

Aes Common aesthetic values.

color and **fill** - string ("red", "#RRGGBB")

linetype - integer or string (0 = "blank", 1 = "solid", 2 = "dashed", 3 = "dotted", 4 = "dotdash", 5 = "longdash", 6 = "twodash")

size - integer (in mm for size of points and text)

linewidth - integer (in mm for widths of lines)

shape - integer/shape name or a single character ("a")



Geoms

Use a geom function to represent data points, use the geom's aesthetic properties to represent variables. Each function returns a layer.

GRAPHICAL PRIMITIVES

```
a <- ggplot(economics, aes(date, unemploy))
b <- ggplot(seals, aes(x = long, y = lat))
```

a + geom_blank() and **a + expand_limits()**
Ensure limits include values across all plots.

b + geom_curve(aes(yend = lat + 1, xend = long + 1, curvature = 1) - x, xend, y, yend, alpha, angle, color, curvature, linetype, size)

a + geom_path(lineend = "butt", linejoin = "round", linemitre = 1) - x, y, alpha, color, group, linetype, size

a + geom_polygon(aes(alpha = 50)) - x, y, alpha, color, fill, group, subgroup, linetype, size

b + geom_rect(aes(xmin = long, ymin = lat, xmax = long + 1, ymax = lat + 1)) - xmax, xmin, ymax, ymin, alpha, color, fill, linetype, size

a + geom_ribbon(aes(ymin = unemploy - 900, ymax = unemploy + 900)) - x, ymax, ymin, alpha, color, fill, group, linetype, size

LINE SEGMENTS

common aesthetics: x, y, alpha, color, linetype, size

b + geom_abline(aes(intercept = 0, slope = 1))
b + geom_hline(aes(yintercept = lat))
b + geom_vline(aes(xintercept = long))

b + geom_segment(aes(yend = lat + 1, xend = long + 1))
b + geom_spoke(aes(angle = 1:1155, radius = 1))

ONE VARIABLE continuous

```
c <- ggplot(mpg, aes(hwy)); c2 <- ggplot(mpg)
```

c + geom_area(stat = "bin")
x, y, alpha, color, fill, linetype, size

c + geom_density(kernel = "gaussian")
x, y, alpha, color, fill, group, linetype, size, weight

c + geom_dotplot()
x, y, alpha, color, fill

c + geom_freqpoly()
x, y, alpha, color, group, linetype, size

c + geom_histogram(binwidth = 5)
x, y, alpha, color, fill, linetype, size, weight

c2 + geom_qq(aes(sample = hwy))
x, y, alpha, color, fill, linetype, size, weight

discrete

```
d <- ggplot(mpg, aes(fl))
```

d + geom_bar()
x, alpha, color, fill, linetype, size, weight

TWO VARIABLES

both continuous

```
e <- ggplot(mpg, aes(cty, hwy))
```

e + geom_label(aes(label = cty)) - x, y, label, alpha, angle, color, family, fontface, hjust, lineheight, size, vjust

e + geom_point()
x, y, alpha, color, fill, shape, size, stroke

e + geom_quantile()
x, y, alpha, color, group, linetype, size, weight

e + geom_rug(sides = "bl")
x, y, alpha, color, linetype, size

e + geom_smooth(method = lm)
x, y, alpha, color, fill, group, linetype, size, weight

e + geom_text(aes(label = cty)) - x, y, label, alpha, angle, color, family, fontface, hjust, lineheight, size, vjust

one discrete, one continuous

```
f <- ggplot(mpg, aes(class, hwy))
```

f + geom_col()
x, y, alpha, color, fill, group, linetype, size

f + geom_boxplot()
x, y, lower, middle, upper, ymax, ymin, alpha, color, fill, group, linetype, shape, size, weight

f + geom_dotplot(binaxis = "y", stackdir = "center")
x, y, alpha, color, fill, group

f + geom_violin(scale = "area")
x, y, alpha, color, fill, group, linetype, size, weight

both discrete

```
g <- ggplot(diamonds, aes(cut, color))
```

g + geom_count()
x, y, alpha, color, fill, shape, size, stroke

e + geom_jitter(height = 2, width = 2)
x, y, alpha, color, fill, shape, size

THREE VARIABLES

```
seals$z <- with(seals, sqrt(delta_long^2 + delta_lat^2)); l <- ggplot(seals, aes(long, lat))
```

l + geom_contour(aes(z = z))
x, y, z, alpha, color, group, linetype, size, weight

l + geom_contour_filled(aes(fill = z))
x, y, alpha, color, fill, group, linetype, size, subgroup

continuous bivariate distribution

```
h <- ggplot(diamonds, aes(carat, price))
```

h + geom_bin2d(binwidth = c(0.25, 500))
x, y, alpha, color, fill, linetype, size, weight

h + geom_density_2d()
x, y, alpha, color, group, linetype, size

h + geom_hex()
x, y, alpha, color, fill, size

continuous function

```
i <- ggplot(economics, aes(date, unemploy))
```

i + geom_area()
x, y, alpha, color, fill, linetype, size

i + geom_line()
x, y, alpha, color, group, linetype, size

i + geom_step(direction = "hv")
x, y, alpha, color, group, linetype, size

visualizing error

```
df <- data.frame(grp = c("A", "B"), fit = 4:5, se = 1:2)
j <- ggplot(df, aes(grp, fit, ymin = fit - se, ymax = fit + se))
```

j + geom_crossbar(fatten = 2) - x, y, ymax, ymin, alpha, color, fill, group, linetype, size

j + geom_errorbar() - x, ymax, ymin, alpha, color, group, linetype, size, width
Also **geom_errorbarh**().

j + geom_linerange()
x, ymin, ymax, alpha, color, group, linetype, size

j + geom_pointrange() - x, y, ymin, ymax, alpha, color, fill, group, linetype, shape, size

maps

Draw the appropriate geometric object depending on the simple features present in the data. aes() arguments: map_id, alpha, color, fill, linetype, linewidth.


```
nc <- sf::st_read(system.file("shape/nc.shp", package = "sf"))
```

ggplot(nc) + geom_sf(aes(fill = AREA))

l + geom_raster(aes(fill = z), hjust = 0.5, vjust = 0.5, interpolate = FALSE)
x, y, alpha, fill

l + geom_tile(aes(fill = z))
x, y, alpha, color, fill, linetype, size, width




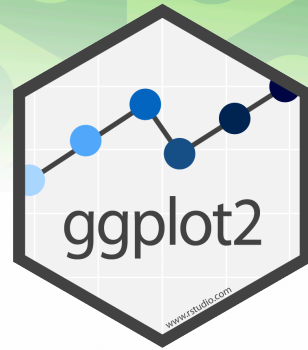

Stats

An alternative way to build a layer.

A stat builds new variables to plot (e.g., count, prop).

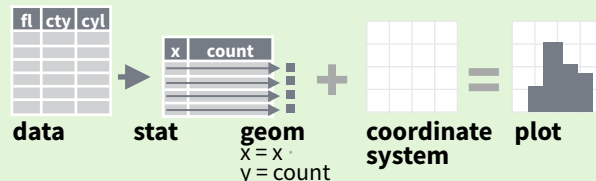

Visualize a stat by changing the default stat of a geom function, `geom_bar(stat="count")` or by using a stat function, `stat_count(geom="bar")`, which calls a default geom to make a layer (equivalent to a geom function). Use `after_stat(name)` syntax to map the stat variable `name` to an aesthetic.

geom to use **stat function** **geom mappings**

```
i + stat_density_2d(aes(fill = after_stat(level)), geom = "polygon")
```

variable created by stat

- `c + stat_bin(binwidth = 1, boundary = 10)`
x, y | count, ncount, density, ndensity
- `c + stat_count(width = 1)` **x, y** | count, prop
- `c + stat_density(adjust = 1, kernel = "gaussian")`
x, y | count, density, scaled
- `e + stat_bin_2d(bins = 30, drop = T)`
x, y, fill | count, density
- `e + stat_bin_hex(bins = 30)` **x, y, fill** | count, density
- `e + stat_density_2d(contour = TRUE, n = 100)`
x, y, color, size | level
- `e + stat_ellipse(level = 0.95, segments = 51, type = "t")`
- `l + stat_contour(aes(z = z))` **x, y, z, order** | level
- `l + stat_summary_hex(aes(z = z), bins = 30, fun = max)`
x, y, z, fill | value
- `l + stat_summary_2d(aes(z = z), bins = 30, fun = mean)`
x, y, z, fill | value
- `f + stat_boxplot(coef = 1.5)`
x, y | lower, middle, upper, width, ymin, ymax
- `f + stat_ydensity(kernel = "gaussian", scale = "area")` **x, y** | density, scaled, count, n, violinwidth, width
- `e + stat_ecdf(n = 40)` **x, y** | x, y
- `e + stat_quantile(quantiles = c(0.1, 0.9), formula = y ~ log(x), method = "rq")` **x, y** | quantile
- `e + stat_smooth(method = "lm", formula = y ~ x, se = T, level = 0.95)` **x, y** | se, x, y, ymin, ymax
- `ggplot() + xlim(-5, 5) + stat_function(fun = dnorm, n = 20, geom = "point")` **x** | x, y
- `ggplot() + stat_qq(aes(sample = 1:100))`
x, y, sample | sample, theoretical
- `e + stat_sum()` **x, y, size** | n, prop
- `e + stat_summary(fun.data = "mean_cl_boot")`
- `h + stat_summary_bin(fun = "mean", geom = "bar")`
- `e + stat_identity()`
- `e + stat_unique()`

Scales

Override defaults with `scales` package.

`Scales` map data values to the visual values of an aesthetic. To change a mapping, add a new scale.

```
n <- d + geom_bar(aes(fill = fl))
```

scale **aesthetic to adjust** **prepackaged scale to use** **scale-specific arguments**

```
n + scale_fill_manual(values = c("skyblue", "royalblue", "blue", "navy"), limits = c("d", "e", "p", "r"), breaks = c("d", "e", "p", "r"), name = "fuel", labels = c("D", "E", "P", "R"))
```

range of values to include in **title to use in legend/axis** **labels to use in legend/axis** **breaks to use in legend/axis**

GENERAL PURPOSE SCALES

- Use with most aesthetics
- `scale_*_continuous()` - Map cont' values to visual ones.
 - `scale_*_discrete()` - Map discrete values to visual ones.
 - `scale_*_binned()` - Map continuous values to discrete bins.
 - `scale_*_identity()` - Use data values as visual ones.
 - `scale_*_manual(values = c())` - Map discrete values to manually chosen visual ones.
 - `scale_*_date(date_labels = "%m/%d")`, `date_breaks = "2 weeks"` - Treat data values as dates.
 - `scale_*_datetime()` - Treat data values as date times. Same as `scale_*_date()`. See `?strptime` for label formats.

X & Y LOCATION SCALES

- Use with x or y aesthetics (x shown here)
- `scale_x_log10()` - Plot x on log10 scale.
 - `scale_x_reverse()` - Reverse the direction of the x axis.
 - `scale_x_sqrt()` - Plot x on square root scale.

COLOR AND FILL SCALES (DISCRETE)

- `n + scale_fill_brewer(palette = "Blues")`
For palette choices: `RColorBrewer::display.brewer.all()`
- `n + scale_fill_grey(start = 0.2, end = 0.8, na.value = "red")`

COLOR AND FILL SCALES (CONTINUOUS)

- `o <- c + geom_dotplot(aes(fill = x))`
- `o + scale_fill_distiller(palette = "Blues")`
- `o + scale_fill_gradient(low="red", high="yellow")`
- `o + scale_fill_gradient2(low="red", high="blue", mid="white", midpoint = 25)`
- `o + scale_fill_gradientn(colors = topo.colors(6))`
Also: `rainbow()`, `heat.colors()`, `terrain.colors()`, `cm.colors()`, `RColorBrewer::brewer.pal()`

SHAPE AND SIZE SCALES

- ```
p <- e + geom_point(aes(shape = fl, size = cyl))
```
- `p + scale_shape() + scale_size()`
  - `p + scale_shape_manual(values = c(3:7))`  
0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25
  - `p + scale_radius(range = c(1,6))`
  - `p + scale_size_area(max_size = 6)`

# Coordinate Systems

- ```
r <- d + geom_bar()
```
- `r + coord_cartesian(xlim = c(0, 5))` - `xlim`, `ylim`
The default cartesian coordinate system.
 - `r + coord_fixed(ratio = 1/2)`
`ratio`, `xlim`, `ylim` - Cartesian coordinates with fixed aspect ratio between x and y units.
 - `r + coord_flip()`
Flip cartesian coordinates by switching x and y aesthetic mappings.
 - `r + coord_polar(theta = "x", direction=1)`
`theta`, `start`, `direction` - Polar coordinates.
 - `r + coord_trans(y = "sqrt")` - `x`, `y`, `xlim`, `ylim`
Transformed cartesian coordinates. Set `xtrans` and `ytrans` to the name of a window function.
 - `π + coord_sf()` - `xlim`, `ylim`, `crs`. Ensures all layers use a common Coordinate Reference System.

Position Adjustments

Position adjustments determine how to arrange geoms that would otherwise occupy the same space.

- ```
s <- ggplot(mpg, aes(fl, fill = drv))
```
- `s + geom_bar(position = "dodge")`  
Arrange elements side by side.
  - `s + geom_bar(position = "fill")`  
Stack elements on top of one another, normalize height.
  - `e + geom_point(position = "jitter")`  
Add random noise to X and Y position of each element to avoid overplotting.
  - `e + geom_label(position = "nudge")`  
Nudge labels away from points.
  - `s + geom_bar(position = "stack")`  
Stack elements on top of one another.

Each position adjustment can be recast as a function with manual `width` and `height` arguments:  
`s + geom_bar(position = position_dodge(width = 1))`

# Themes

- `r + theme_bw()`  
White background with grid lines.
- `r + theme_classic()`
- `r + theme_light()`
- `r + theme_gray()`  
Grey background (default theme).
- `r + theme_linedraw()`  
Minimal theme.
- `r + theme_dark()`  
Dark for contrast.
- `r + theme_void()`  
Empty theme.
- `r + theme()` Customize aspects of the theme such as axis, legend, panel, and facet properties.  
`r + labs(title = "Title") + theme(plot.title.position = "plot")`  
`r + theme(panel.background = element_rect(fill = "blue"))`

# Faceting

Facets divide a plot into subplots based on the values of one or more discrete variables.

- ```
t <- ggplot(mpg, aes(cty, hwy)) + geom_point()
```
- `t + facet_grid(. ~ fl)`
Facet into columns based on fl.
 - `t + facet_grid(year ~ .)`
Facet into rows based on year.
 - `t + facet_grid(year ~ fl)`
Facet into both rows and columns.
 - `t + facet_wrap(~ fl)`
Wrap facets into a rectangular layout.

Set `scales` to let axis limits vary across facets.

- `t + facet_grid(drv ~ fl, scales = "free")`
x and y axis limits adjust to individual facets:
"free_x" - x axis limits adjust
"free_y" - y axis limits adjust

Set `labeller` to adjust facet label:

- ```
t + facet_grid(. ~ fl, labeller = label_both)
```
- |       |       |       |       |       |
|-------|-------|-------|-------|-------|
| fl: c | fl: d | fl: e | fl: p | fl: r |
|-------|-------|-------|-------|-------|
- ```
t + facet_grid(fl ~ ., labeller = label_bquote(alpha ^ .(fl)))
```
- | | | | | |
|------------|------------|------------|------------|------------|
| α^c | α^d | α^e | α^p | α^r |
|------------|------------|------------|------------|------------|

Labels and Legends

Use `labs()` to label the elements of your plot.

- `t + labs(x = "New x axis label", y = "New y axis label", title = "Add a title above the plot", subtitle = "Add a subtitle below title", caption = "Add a caption below plot", alt = "Add alt text to the plot", <AES> = "New <AES> legend title")`
- `t + annotate(geom = "text", x = 8, y = 9, label = "A")`
Places a geom with manually selected aesthetics.
- `p + guides(x = guide_axis(n.dodge = 2))` Avoid crowded or overlapping labels with `guide_axis(n.dodge or angle)`.
- `n + guides(fill = "none")` Set legend type for each aesthetic: `colorbar`, `legend`, or `none` (no legend).
- `n + theme(legend.position = "bottom")`
Place legend at "bottom", "top", "left", or "right".
- `n + scale_fill_discrete(name = "Title", labels = c("A", "B", "C", "D", "E"))`
Set legend title and labels with a scale function.

Zooming

- Without clipping (preferred):**
`t + coord_cartesian(xlim = c(0, 100), ylim = c(10, 20))`
- With clipping (removes unseen data points):**
`t + xlim(0, 100) + ylim(10, 20)`
`t + scale_x_continuous(limits = c(0, 100)) + scale_y_continuous(limits = c(0, 100))`